


Trash/Recycling Toter Placement

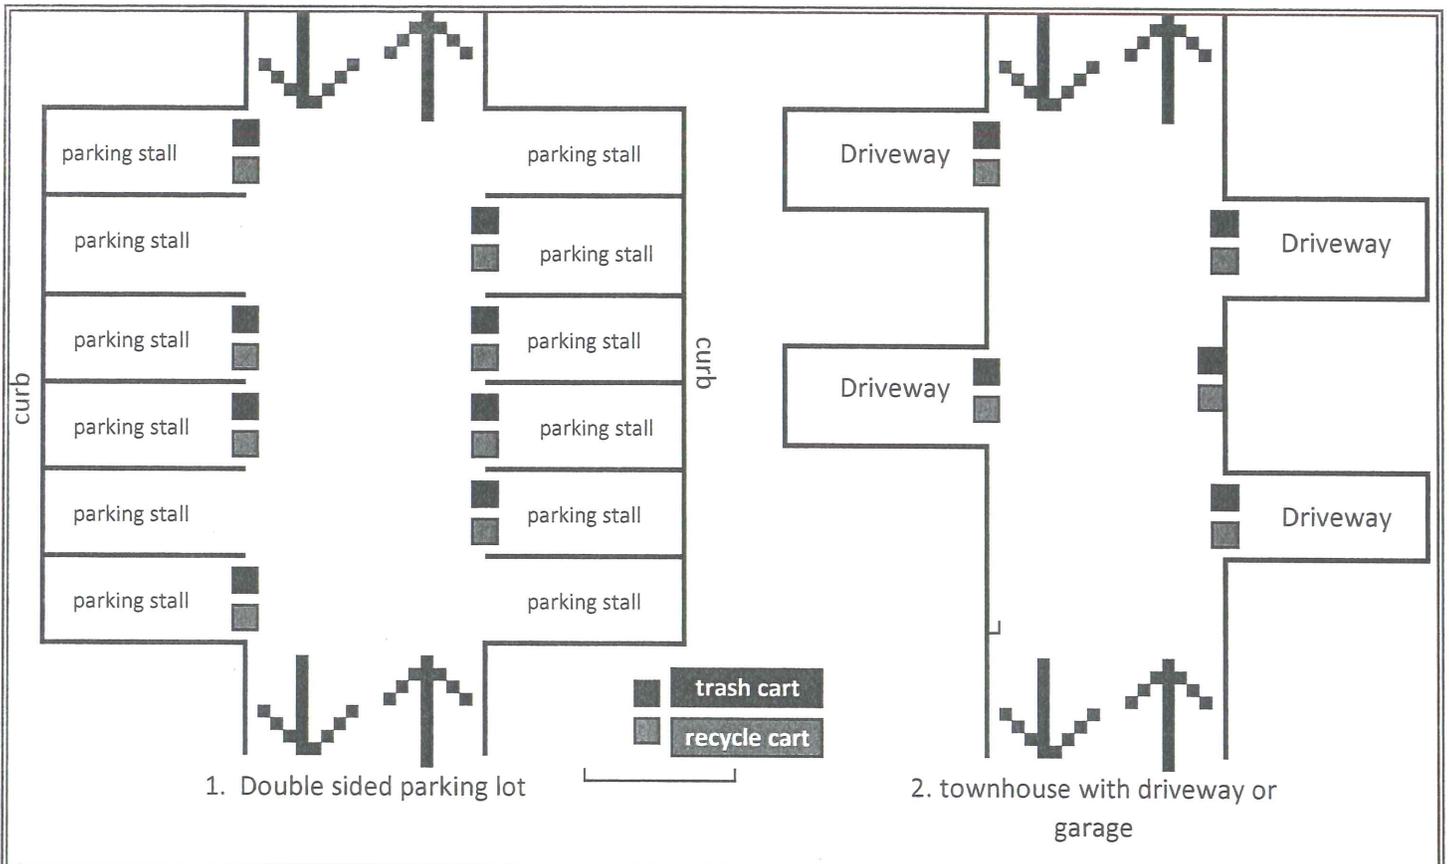

Winslow Township – Multi-Family; Row Home; Townhouse; etc. rules for cart placement

1. Where there are parking lots, the carts are to be placed at the end of the parking stall (opposite the curb end) to allow the truck driving down the aisle of the parking lot to access the cart. The carts should be placed with the wheels on the curb end of the parking space, and the lid opening facing the aisle of the parking lot. There must be 3 feet between the carts to allow the cart grabber to grab the cart. Where a car is parked in the parking stall, there must be at least 3 feet between the cart(s) and the car.

2. Where a unit has a driveway and/or garage – the carts should be placed at the curb-line of the street at the end of the driveway, with the wheels at the curb, and the lid opening facing the street, with 3 feet between them to allow the cart grabber to grab the cart. Where a car is parked in the driveway, there must be at least 3 feet between the cart(s) and the car.

Keep in mind, that the collection of waste and recycling using these carts is an automated process where the truck uses a large robotic arm to grab, lift, and dump the cart. The truck operator does not exit the cab to move your cart into position – therefore, it is essential that you place the cart properly.

The truck and robotic arm is large and needs space to operate and the carts must be separated by adequate space (3 feet) to allow the robotic cart grabber (clamp) to grab the cart. If carts are too close to one another, or too close to a fixed object (parked vehicle), the cart cannot be picked up and dumped.

Carts must be placed facing the collection vehicle (cart wheels toward the curb) to allow the lid to swing open and empty into the truck when the cart is tipped. If the cart is facing the wrong way, the cart cannot be emptied.